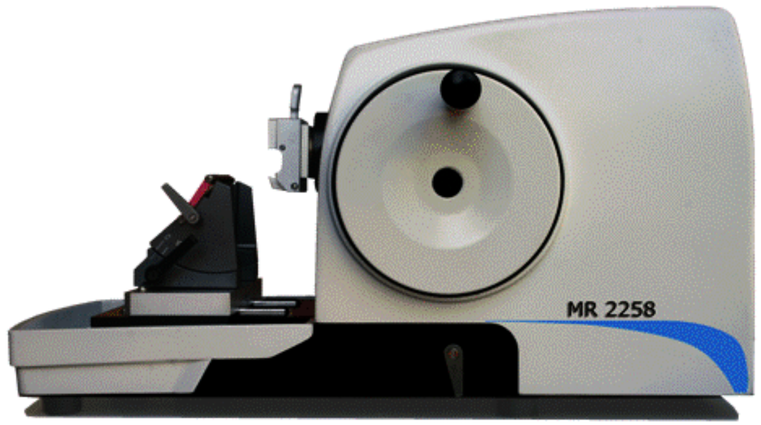


Technical Specifications

Section thickness:

- Setting range: 1– 60 µm
- Setting values: 0,5 - 2 µm in 0,5 µm increments
- 2 - 10 µm in 1 µm increments
- 10 - 20 µm in 2 µm increments
- 20 - 60 µm in 5 µm increments

Horizontal specimen feed: appox. 25 mm

Vertical stroke: 60 mm

Specimen orientation: Horizontal : 8°
Vertical: 8°

Maximum specimen size: W 50 x H 66 x D 30 mm


Dimensions:

- Width (including handwell): 400 mm
- Depth (including waste tray): 600 mm
- Height: 300 mm
- Weight: 34 Kg

Distributed by:

Via Brembo, 27 - Milano Italy Tel: +39 0255230061 Fax: +39 0255213764 Email: histoline@histoline.com URL: www.histoline.com


NB: Specifications are subject to change without any prior notice

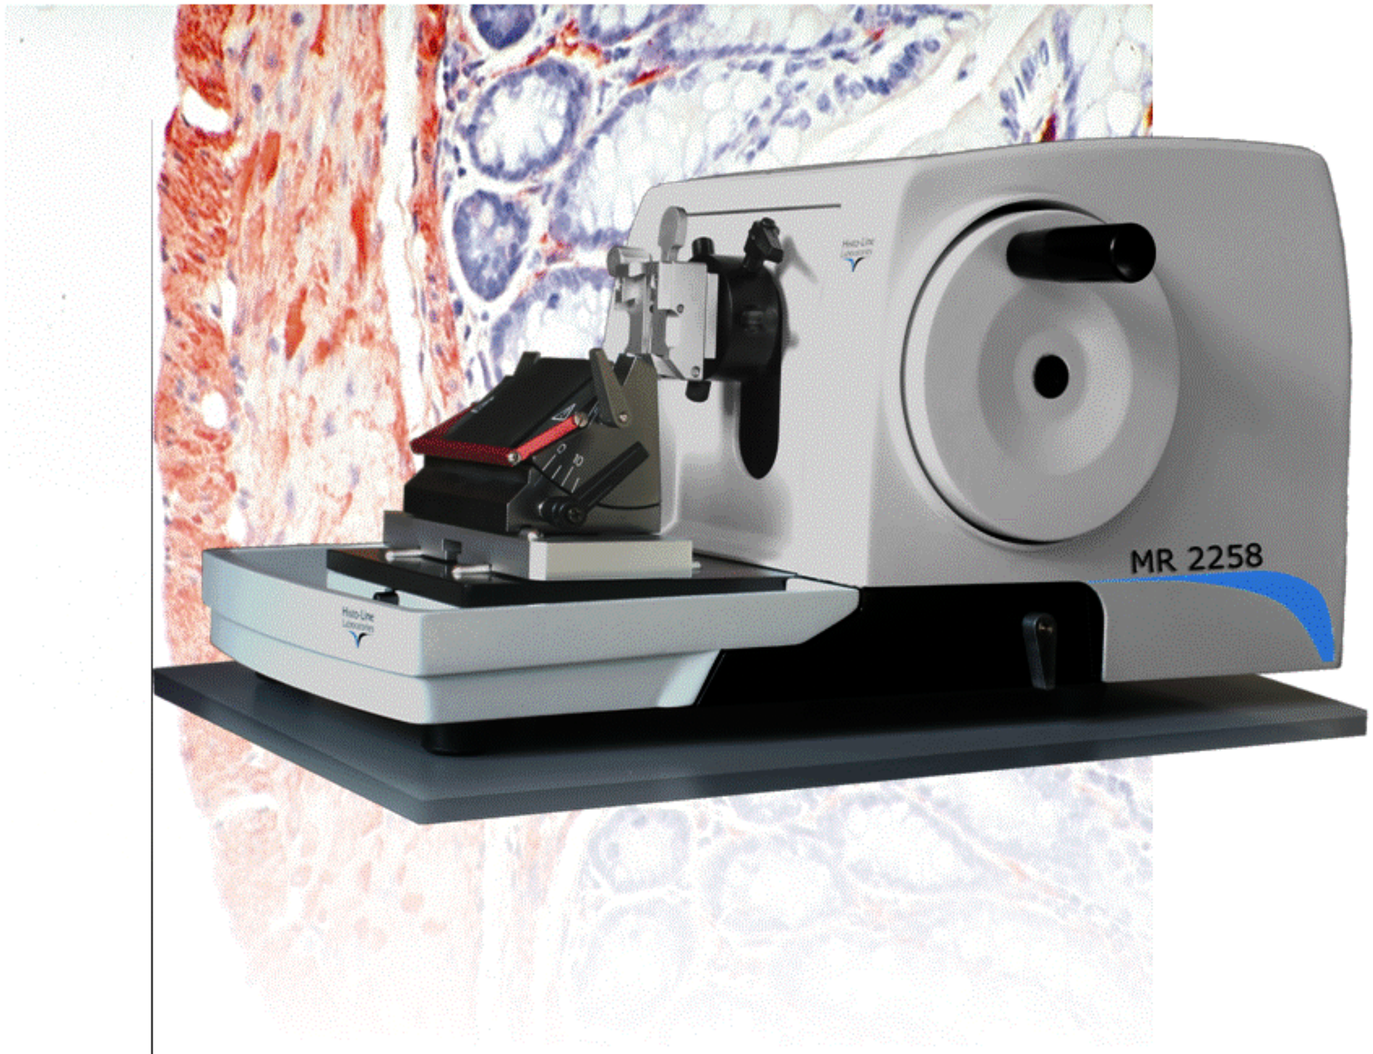

MR 2258


Manual Rotary Microtome

MR 2258 Manual Rotary Microtome

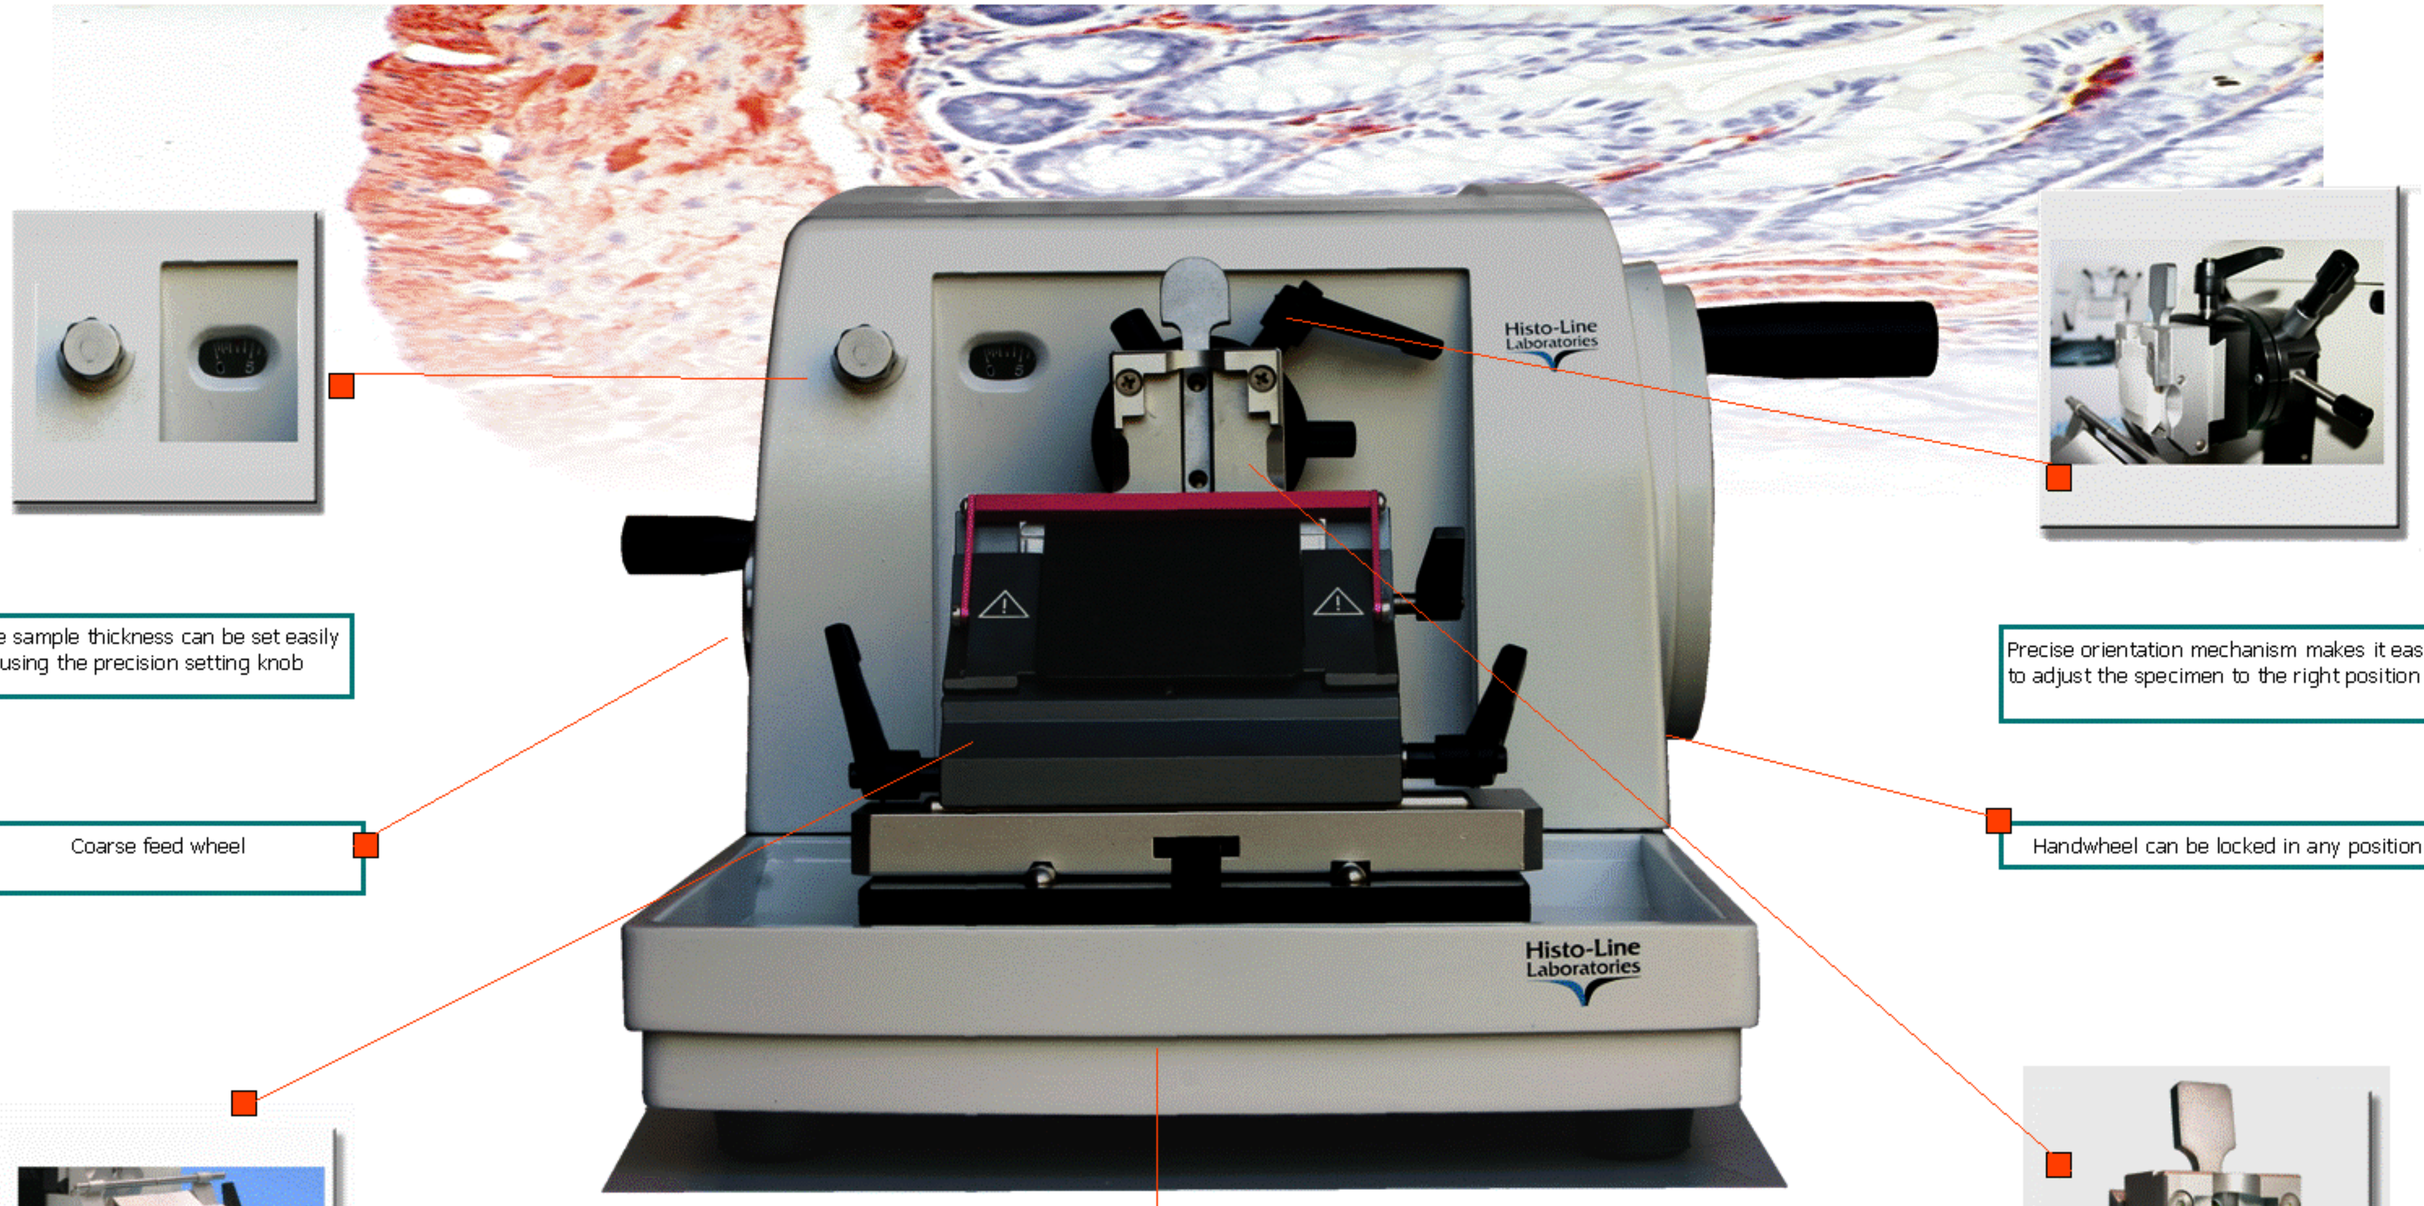

The sample thickness can be set easily by using the precision setting knob

Coarse feed wheel

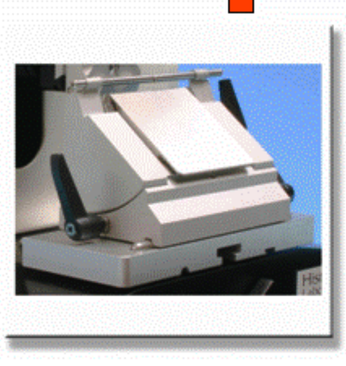


Lateral blade holder adjustment. The entire width of blades can be used without releasing the blade

Large sections waste tray

Precise orientation mechanism makes it easy to adjust the specimen to the right position

Handwheel can be locked in any position

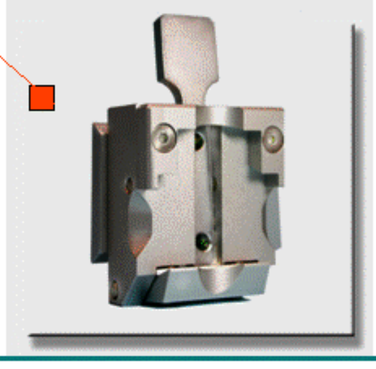

Universal fast release cassette clamp, suitable for all type of embedding cassettes or rings



Want More Information ? www.histo-online.com